









# Resale Equipment

GMCEO Engineering Services (Pty) Ltd  
 24 General Smuts Street  
 Vereeniging  
 1939  
 Tel: +27 16 421 3513  
 Cell: +27 71 609 8177  
[www.gmceo.co.za](http://www.gmceo.co.za)

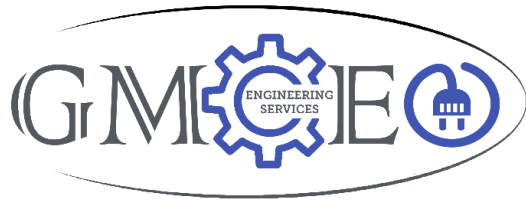


Reference no.: 2527 – Hydraulic Cable Cutter, Holmatro ICU 10A10



|  |   |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
|--|---|--|--------|-------------|------------|----------|---------------------------|----------|------------------|-----|--------------------|------------|----------------------|---|-----------|------|------------------------|-------------|----------------------|---------|-----------------------------|----|--|---|
| <b>Make</b>  | Holmatro  |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| <b>Applications:</b>   | Cutter: ICU 10 A 10   | Pump: IPU-M 12W6SD   |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| Cutter used with special blade guiding system for cable recycling and production   |                                      |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| <table border="1"> <tr><td>model</td><td>ICU 10 A 10</td></tr> <tr><td>art no</td><td>170.012.053</td></tr> <tr><td>blade type</td><td>10 cable</td></tr> <tr><td>working pressure bars/Mpa</td><td>500 / 50</td></tr> <tr><td>blade opening mm</td><td>134</td></tr> <tr><td>cutting force kN/t</td><td>242 / 24.6</td></tr> <tr><td>spreading force kN/t</td><td>-</td></tr> <tr><td>weight kg</td><td>17.3</td></tr> <tr><td>dimensions (lxxwxh) mm</td><td>735x230x177</td></tr> <tr><td>temperature reach °C</td><td>-20 +80</td></tr> <tr><td>oil content cm<sup>3</sup></td><td>84</td></tr> </table> | model   | ICU 10 A 10  | art no | 170.012.053 | blade type | 10 cable | working pressure bars/Mpa | 500 / 50 | blade opening mm | 134 | cutting force kN/t | 242 / 24.6 | spreading force kN/t | - | weight kg | 17.3 | dimensions (lxxwxh) mm | 735x230x177 | temperature reach °C | -20 +80 | oil content cm <sup>3</sup> | 84 | <b>Trolley:</b><br> | <b>Balancer:</b><br> |
| model  | ICU 10 A 10   |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| art no   | 170.012.053   |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| blade type   | 10 cable  |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| working pressure bars/Mpa  | 500 / 50  |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| blade opening mm   | 134   |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| cutting force kN/t   | 242 / 24.6  |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| spreading force kN/t   | -   |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| weight kg  | 17.3  |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| dimensions (lxxwxh) mm   | 735x230x177   |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| temperature reach °C   | -20 +80   |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| oil content cm <sup>3</sup>  | 84  |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| Cutter used with standard blade* for car recycling and demolition  | <b>Service set:</b><br>             |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
|   | <b>* Blades set 30 standard:</b><br> |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| <b>Supply voltage</b>  | 220V  |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| <b>Availability</b>  | Immediately   |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |
| <b>Location</b>  | Vereeniging   |  |        |             |            |          |                           |          |                  |     |                    |            |                      |   |           |      |                        |             |                      |         |                             |    |  |   |

# Resale Equipment

GMCEO Engineering Services (Pty) Ltd  
24 General Smuts Street  
Vereeniging  
1939  
Tel: +27 16 421 3513  
Cell: +27 71 609 8177  
[www.gmceo.co.za](http://www.gmceo.co.za)

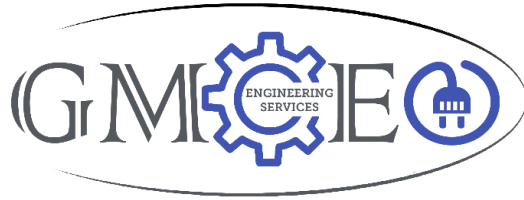

Reference no.: 2527 – Hydraulic Cable Cutter, Holmatro ICU 10A10

## **Advantages:**

- Demo model, only used for demonstration purposes
- Holmatro design – made in Netherlands
- Very safe to use; both hand operation, dead man's function & guarded moving parts
- Balancer for virtually weightless operation of cutter
- Transport trolley - mobile set consisting of cutter, pump & hose, easily moveable by one person
- Hydraulic pack; compact, lightweight, durable and low maintenance
- Hydraulic hoses; complete with couplers, 4:1 safety ratio, anti-kink spring on both sides
- All equipment immediately available

## **Commercial conditions:**

|                |  |
|----------------|--|
| Payment terms  | 100% prior to collection   |
| Delivery time  | On stock   |
| Offer validity | Offers are subject to prior sales of machines without any notice |
| Price          | Quotation available on request                                   |
| Price basis    | Ex-Factory, Vereeniging, South Africa                            |
| Packaging      | Exclude packaging  |

Inspection and testing of machine can be arranged by appointment.

Contact Ronel or Anton:

Tel: +27 16 421 3513

Cell: +27 71 609 8177

[anton@gmceo.co.za](mailto:anton@gmceo.co.za)

[ronel@gmceo.co.za](mailto:ronel@gmceo.co.za)